

DRAWING LEGEND

[Fig.1]

A1: position reference
A2: speed reference
A3: predicted disturbance torque (thrust)
A4: torque (thrust) reference
A5: new torque (thrust) reference
A6: speed of motor

[Fig.2]

A1: new torque (thrust) reference
A2: speed of motor
A3: predicted disturbance torque (thrust)

[Fig.3]

A1: new torque (thrust) reference
A2: speed of motor
A3: predicted disturbance torque (thrust)

[Fig.4]

A1: new torque (thrust) reference
A2: speed of motor
A3: predicted disturbance torque (thrust)

[Fig.5]

A1: speed reference

DRAWING LEGEND

[Fig.6]

A1: position reference speed

[Fig.7]

A1: position deviation moment of inertia ratio 0[%]

A2: position deviation moment of inertia ratio 1500[%]

A3: set correct moment of inertia ratio

[Fig.8]

(a)

13: inertia variation restraining means

A1: position reference

A2: speed reference

A3: torque (thrust) reference

A4: predicted disturbance torque (thrust)

A5: new torque (thrust) reference

A6: speed of motor

(b)

A1: torque (thrust) reference

A2: speed of motor

A3: predicted speed of motor

[Fig.9]

A1: position deviation moment of inertia ratio 0[%]

A2: position deviation moment of inertia ratio 2500[%]

DRAWING LEGEND

A3: set correct moment of inertia ratio

[Fig.10]

A1: add low pass filter to Embodiment 2

A2: set correct moment of inertia ratio

[Fig.11]

A1: position reference

A2: speed reference

A3: torque (thrust) reference

A4: new torque (thrust) reference

A5: predicted disturbance torque (thrust)

A6: speed of motor

[Fig.13]

A1: speed loop gain K_v

A2: LPF time constant of speed observer

[Fig.14]

A1: speed loop gain K_v

A2: LPF time constant of speed observer

[Fig.15]

(a)

A1: position reference

DRAWING LEGEND

A2: speed reference

A3: speed of motor

A4: torque (thrust) reference

(b)

A1: speed reference

A2: torque (thrust) reference

[Fig.16]

A1: position reference

A2: speed reference

A3: predicted disturbance torque (thrust)

A4: torque (thrust) reference

A5: new torque (thrust) reference

A6: speed of motor

[Fig.17]

A1: position reference speed

(a) speed of motor (moment of inertia ratio 0[%])

(b) speed of motor (moment of inertia ratio 1000[%])

(c) speed of motor (moment of inertia ratio 2500[%])

[Fig.18]

A1: speed loop gain K_v

A2: low pass filter cut off frequency of phase advancing filter

DRAWING LEGEND

[Fig.19]

A1: speed loop gain K_v

A2: low pass filter cut off frequency of phase advancing filter

[Fig.20]

A1: position reference

A2: speed reference

A3: torque (thrust) reference

A4: new torque (thrust) reference

A5: predicted disturbance torque (thrust)

A6: speed of motor

[Fig.21]

A1: position reference speed

A2: moment of inertia ratio = 0 %

A3: moment of inertia ratio = 1000 %

A4: moment of inertia ratio = 200 %

[Fig.22]

A1: position reference

A2: speed reference

A3: torque (thrust) reference

A4: new torque (thrust) reference

A5: predicted disturbance torque (thrust)

A6: speed of motor

DRAWING LEGEND

[Fig.23]

- A1: position reference speed
- A2: moment of inertia ratio = 0 %
- A3: moment of inertia ratio = 1000 %
- A4: moment of inertia ratio = 300 %

[Fig.24]

- A1: position reference
- A2: speed reference
- A3: torque (thrust) reference
- A4: new torque (thrust) reference
- A5: predicted disturbance torque (thrust)
- A6: speed of motor

[Fig.25]

- A1: position reference speed
- A2: moment of inertia ratio = 0 %
- A3: moment of inertia ratio = 1000 %
- A4: moment of inertia ratio = 1500 %

[Fig.26]

- A1: position reference
- A2: speed reference
- A3: torque (thrust) reference

DRAWING LEGEND

A4: new torque (thrust) reference

A5: predicted disturbance torque (thrust)

A6: speed of motor

[Fig.27]

A1: position reference speed

A2: moment of inertia ratio = 0 %

A3: moment of inertia ratio = 1000 %

A4: moment of inertia ratio = 1500 %

Fig 1

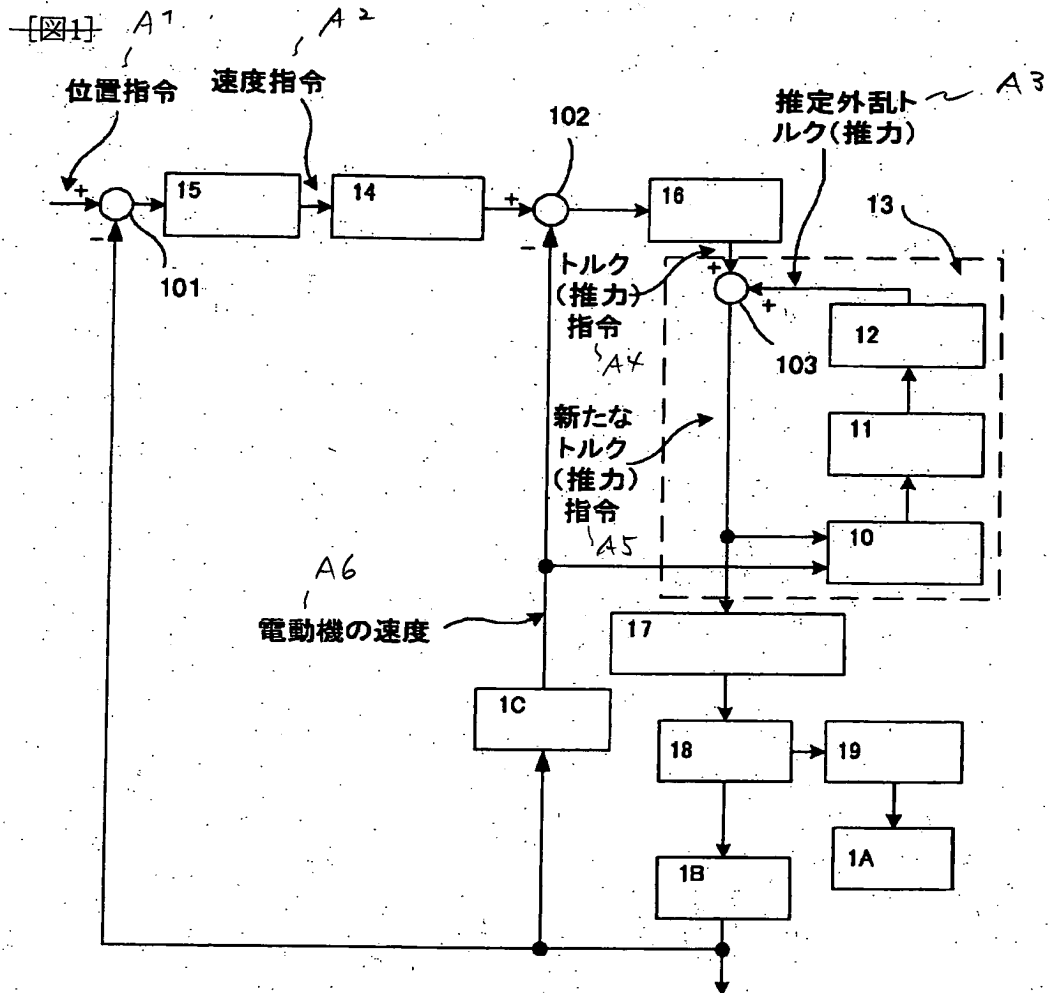


Fig. 2





Fig. 3



A3

Fig. 4


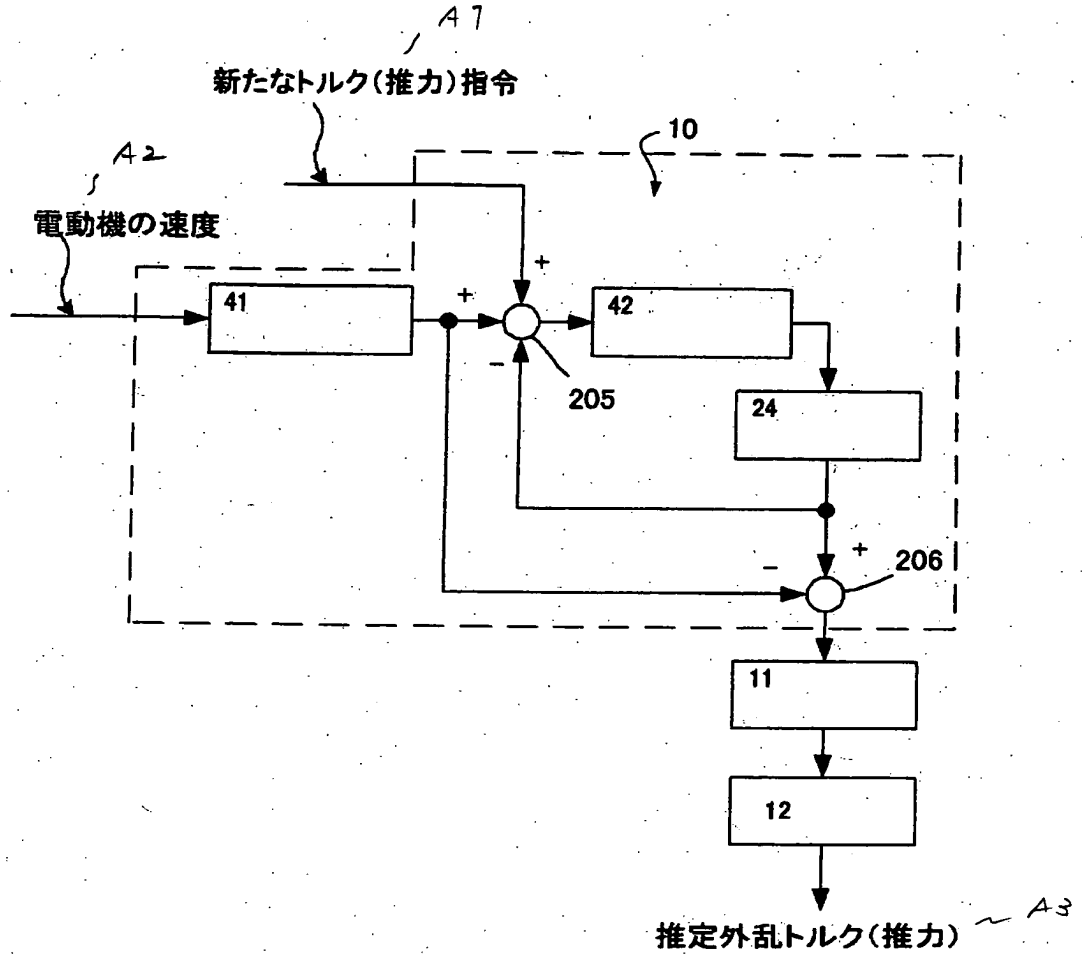



Fig. 5

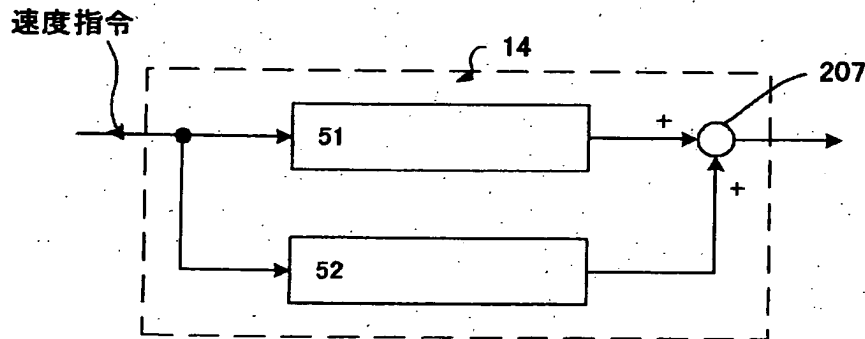

4/22


[[図6]]

Fig. 6

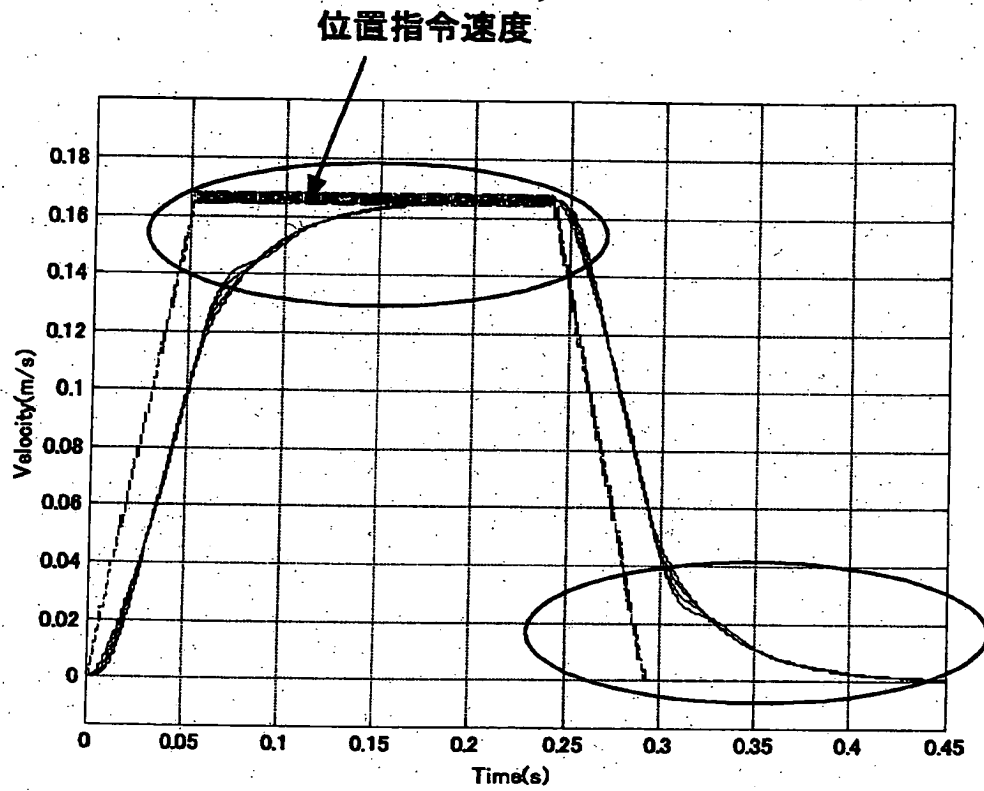



[[図7]]

Fig. 7

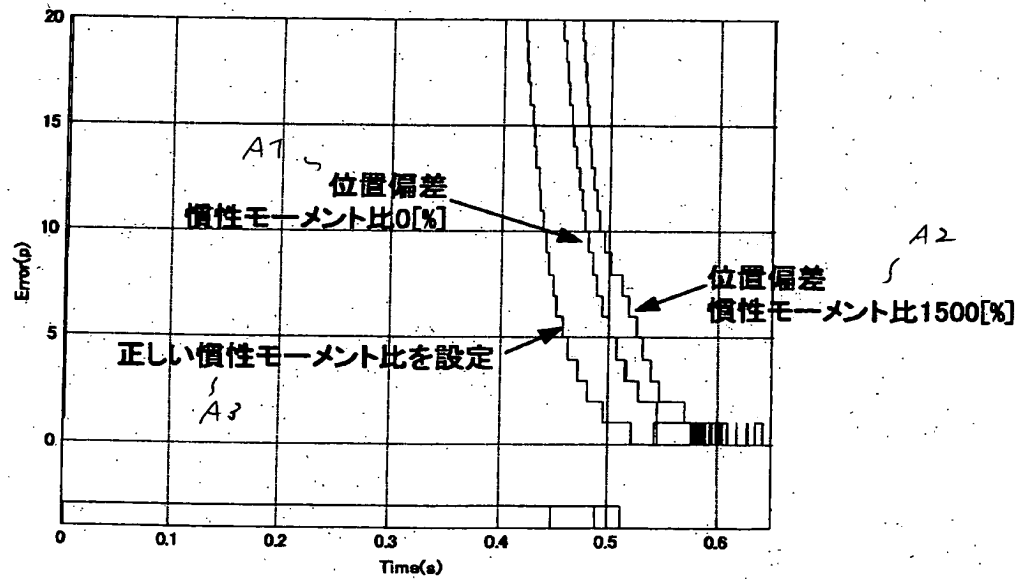


〔図8〕

Fig. 8

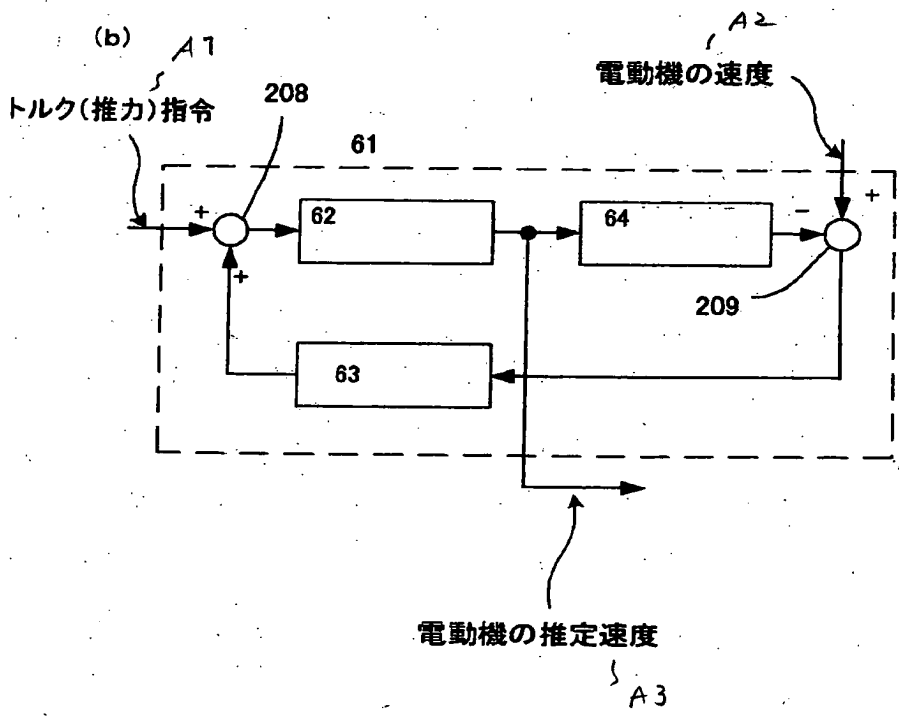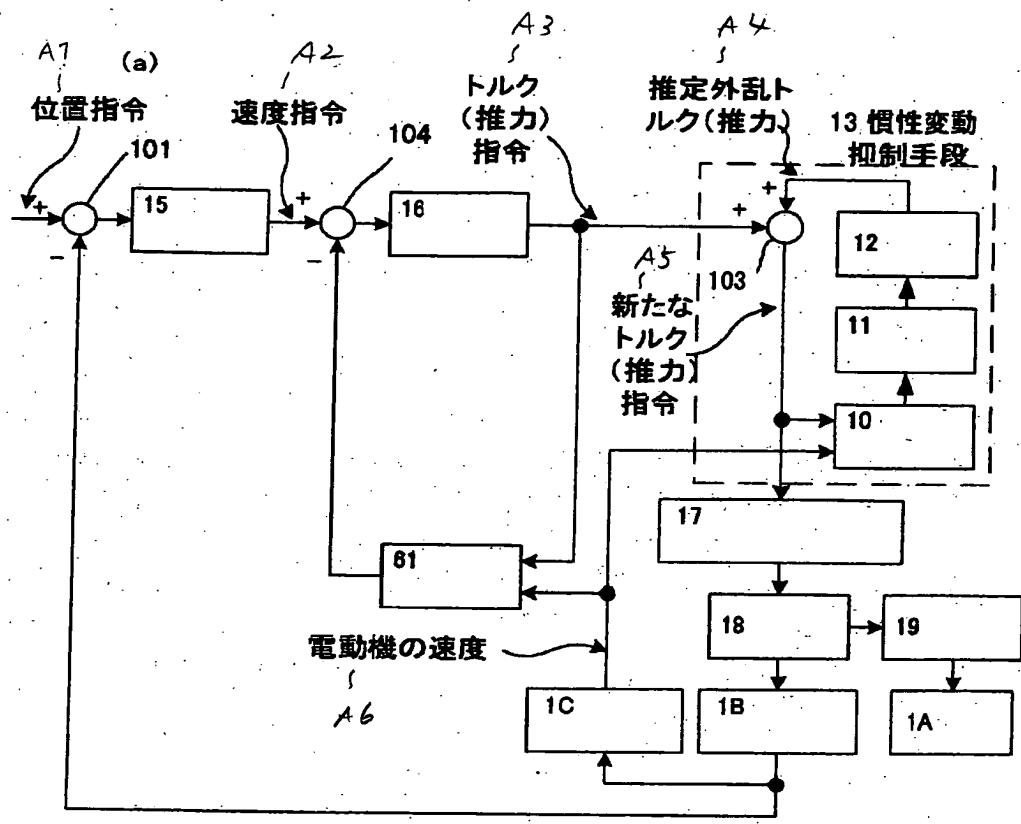


[図9]


Fig. 9

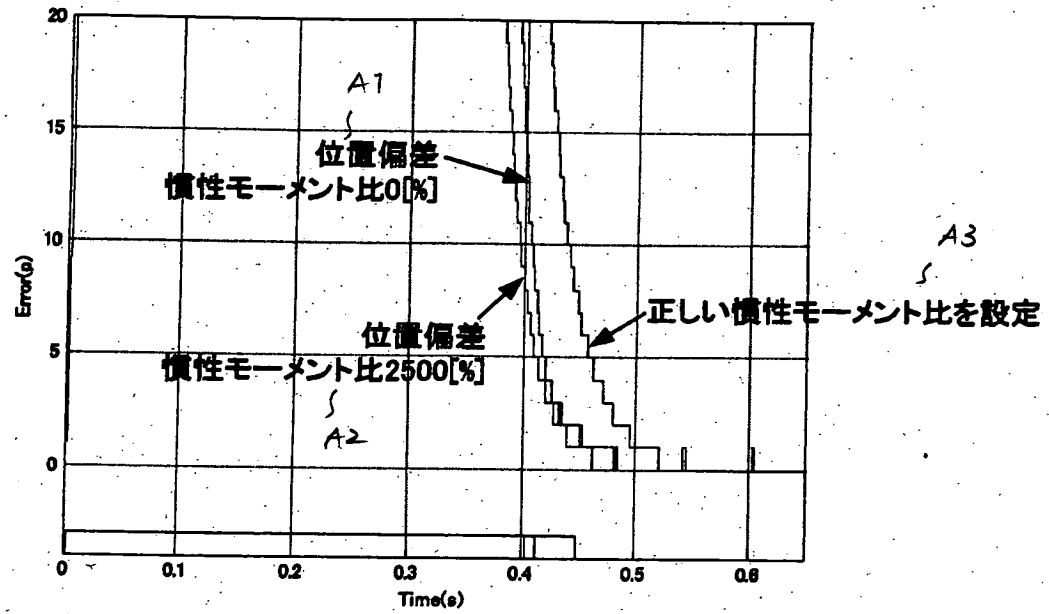

[図10]


Fig. 10

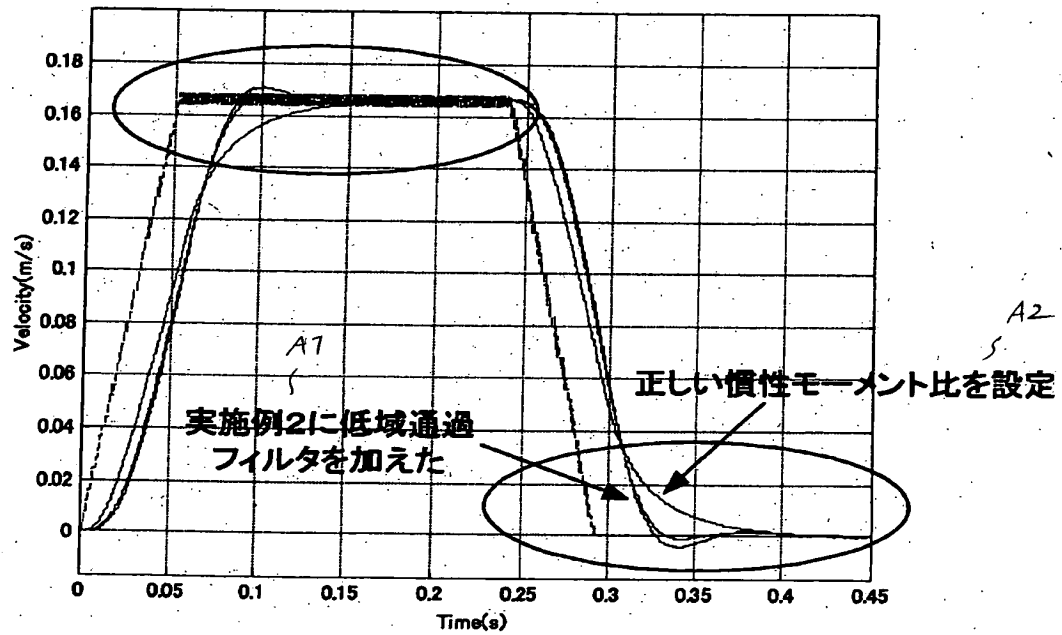

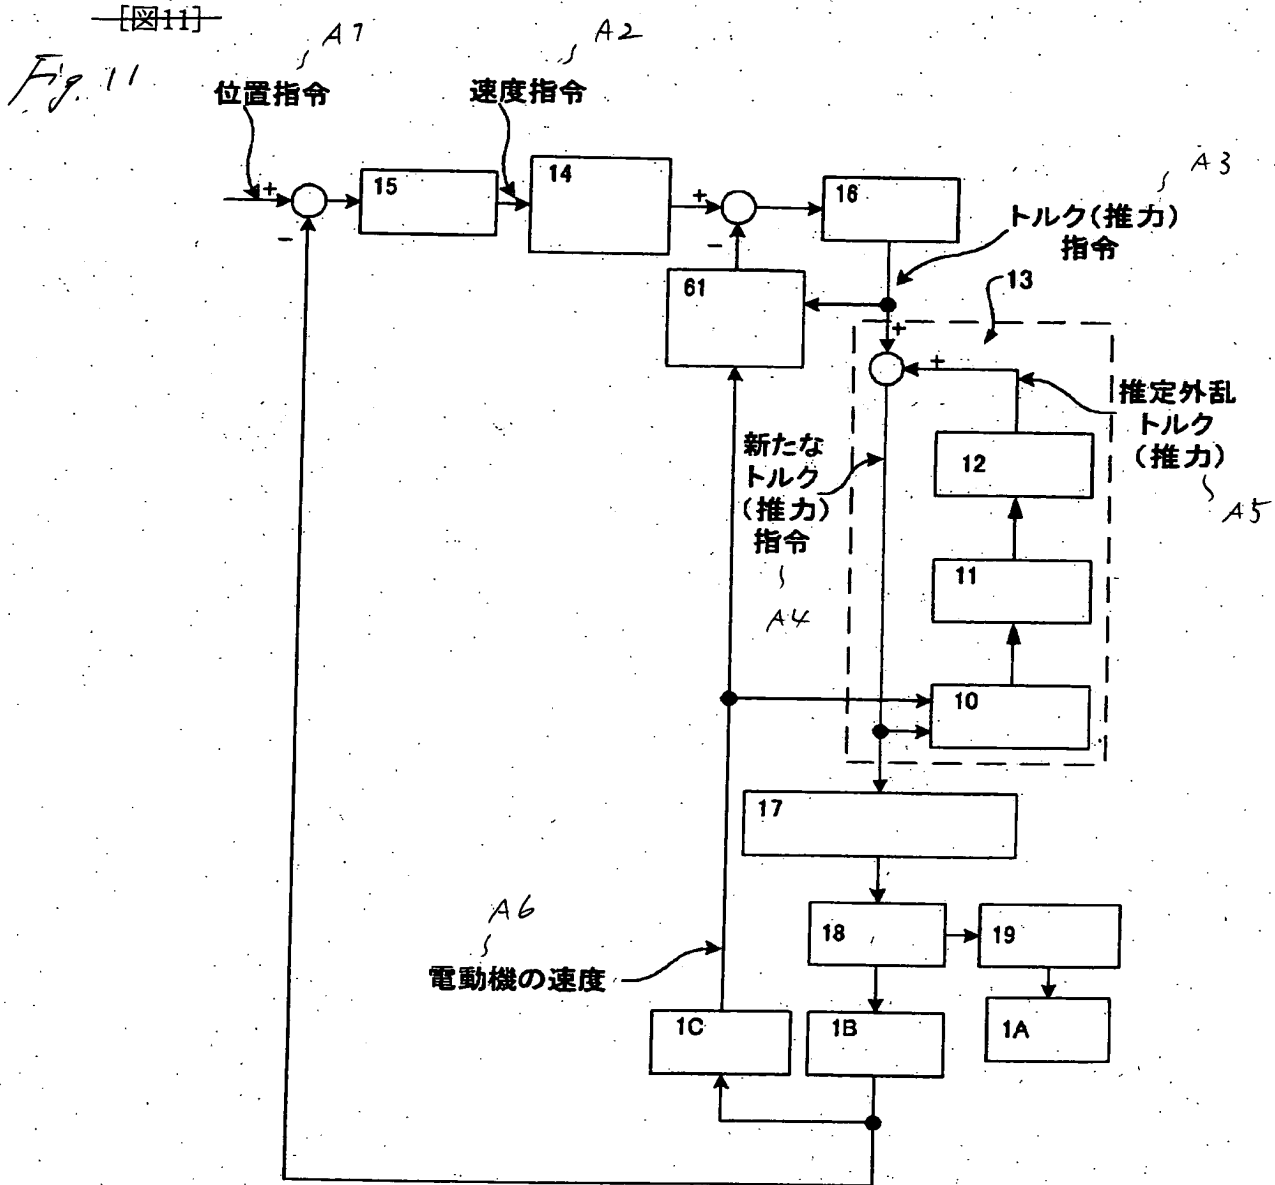

[12]

Fig. 12

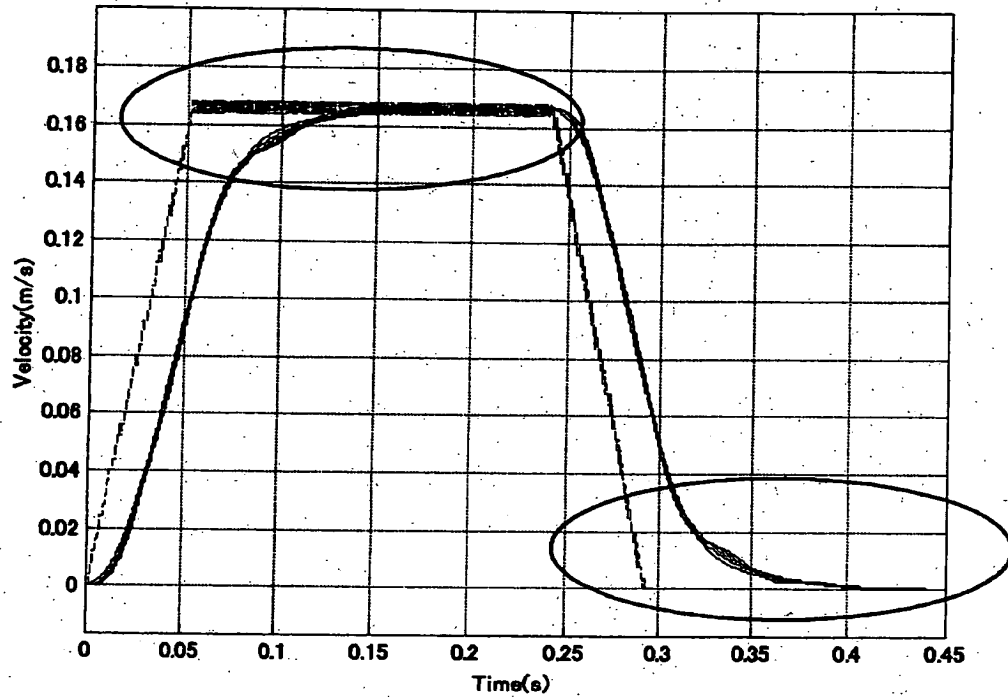


9/22

[[図13]]

Fig. 13

速度オブザーバーのLFF時定数
 A2

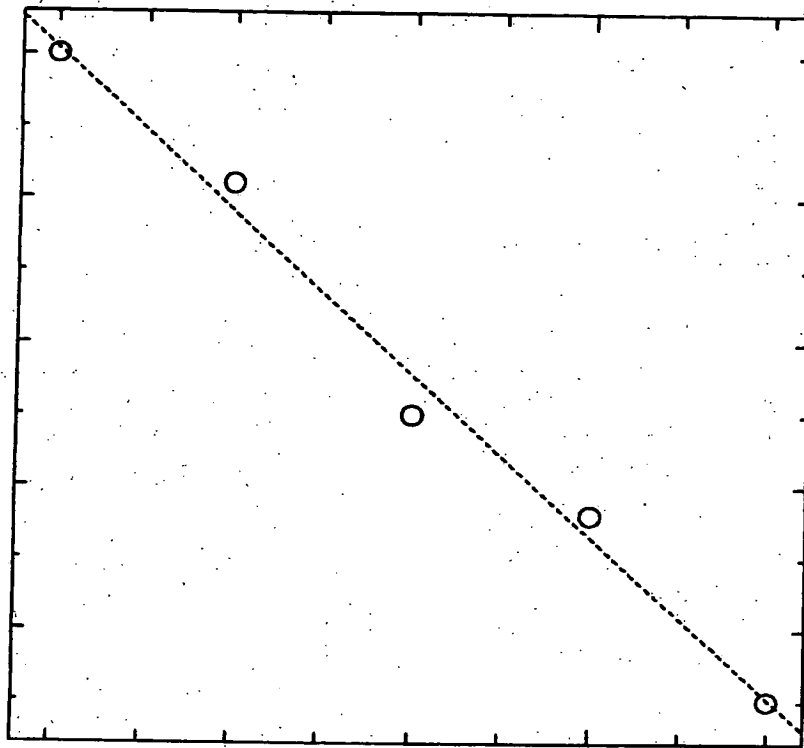


速度ループゲイン K_v

↓
 A1

[図14]



Fig 14

速度オブザーバのLPPF時定数
 A2

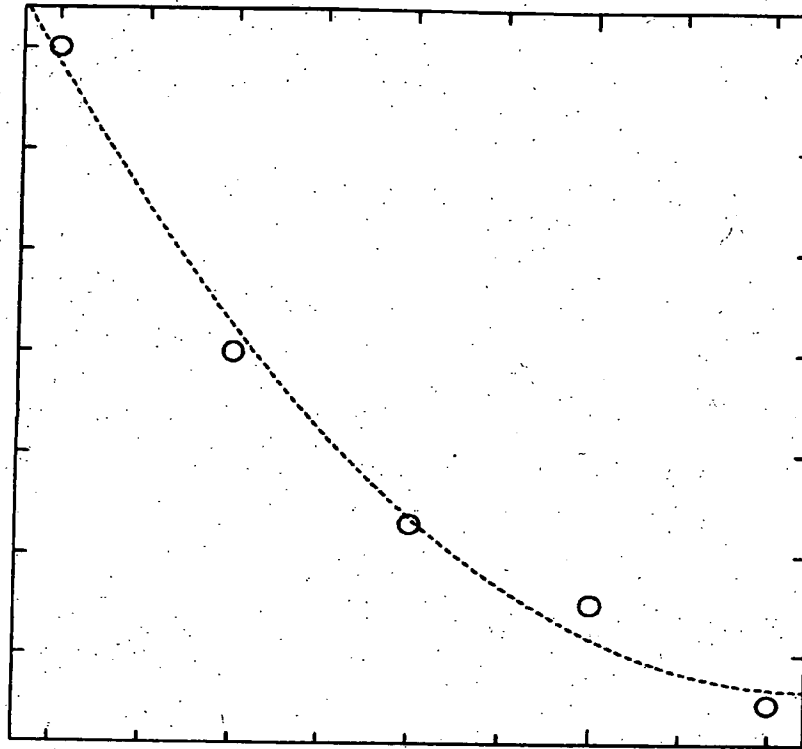

速度ループゲイン K_v
 A1


[図15]
Fig. 15

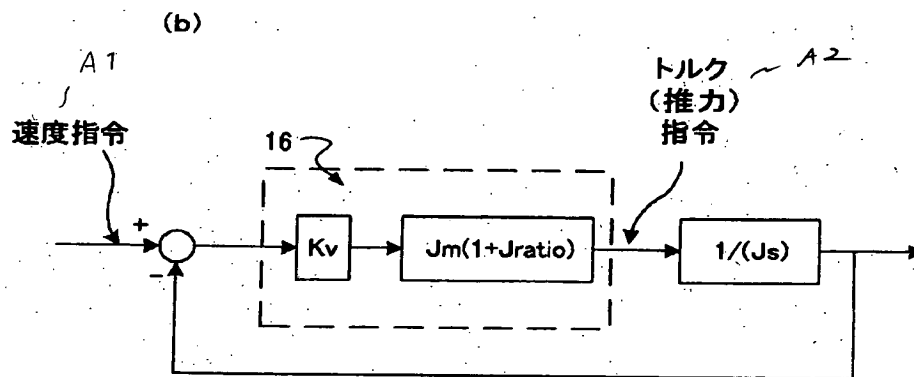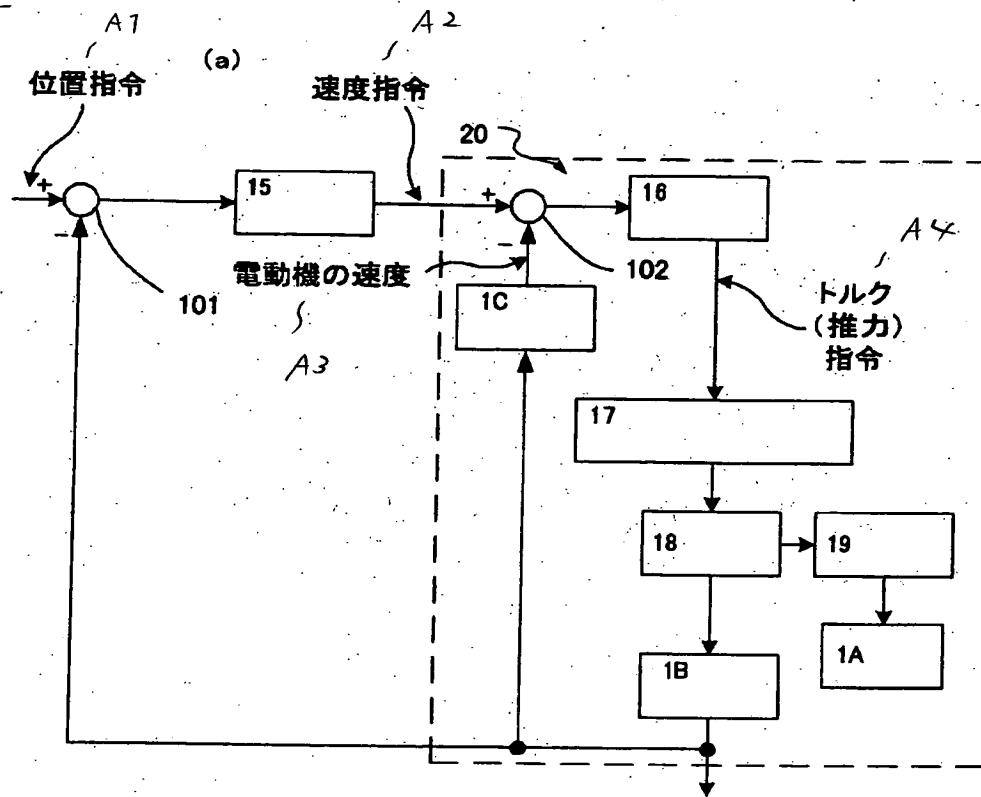

12/22


[図16]

Fig 16

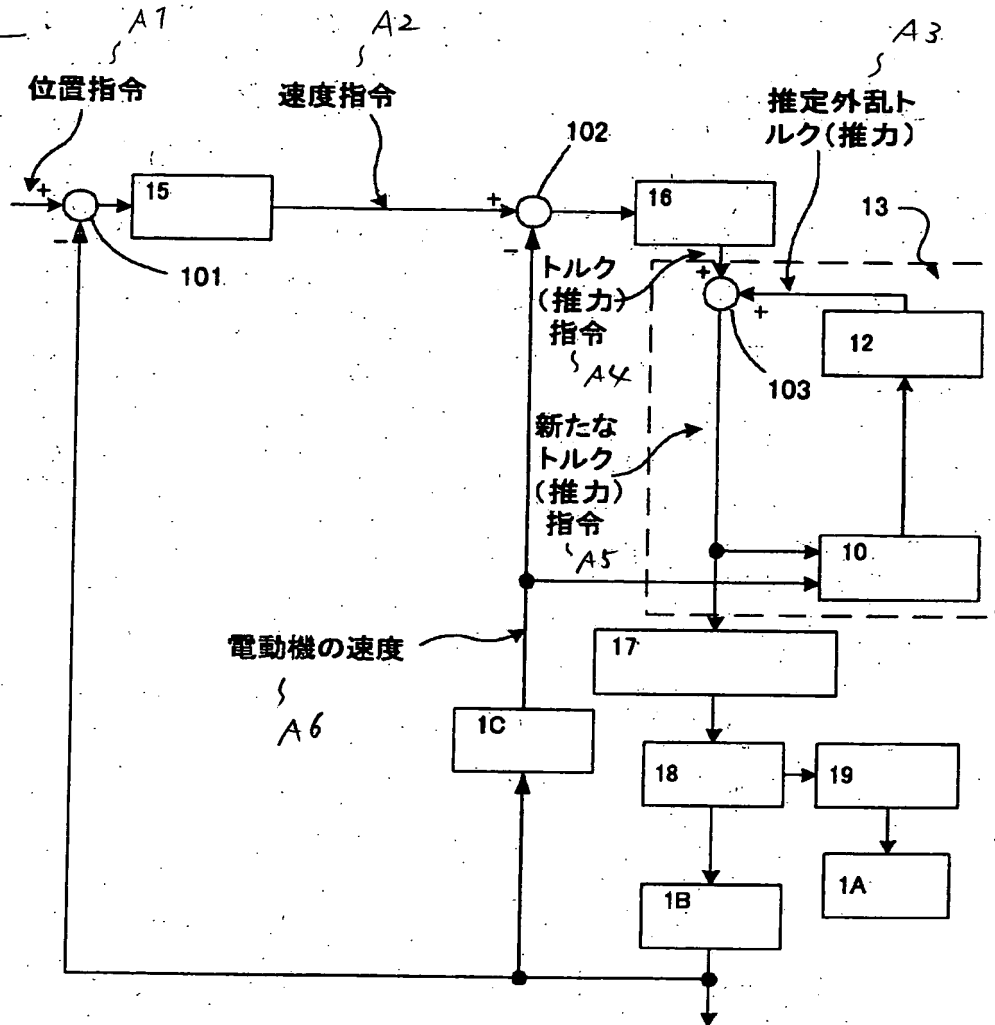

[図17]

Fig. 17

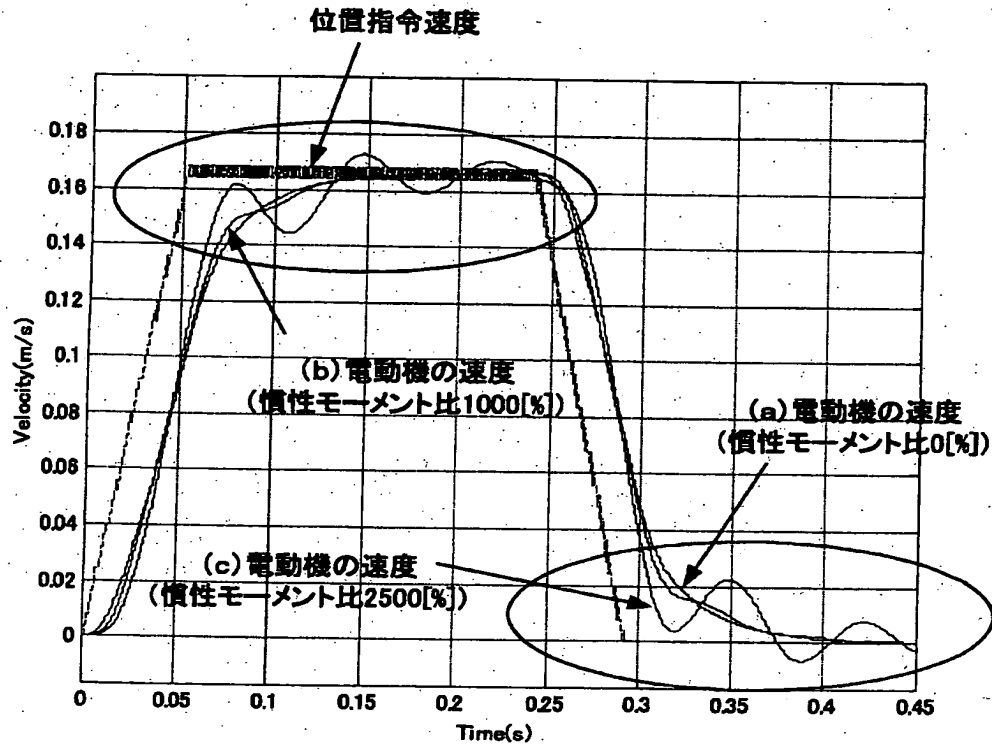


[図18]

Fig. 18

位相進めフィルタ低域通過フィルタ遮断周波数

A2 ~

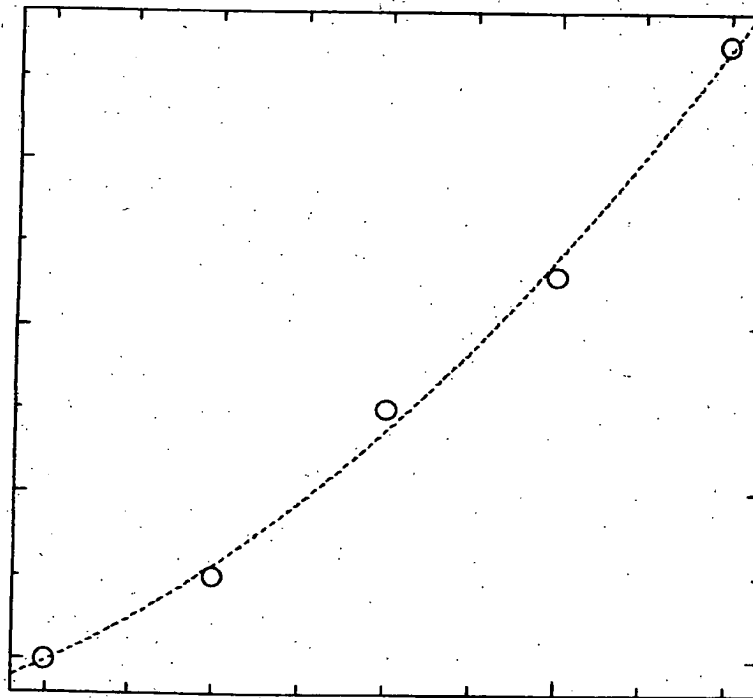

速度ループゲイン K_v


S
A1

[図19]

Fig. 19

A2

位相進めフィルタ低域通過フィルタ遮断周波数

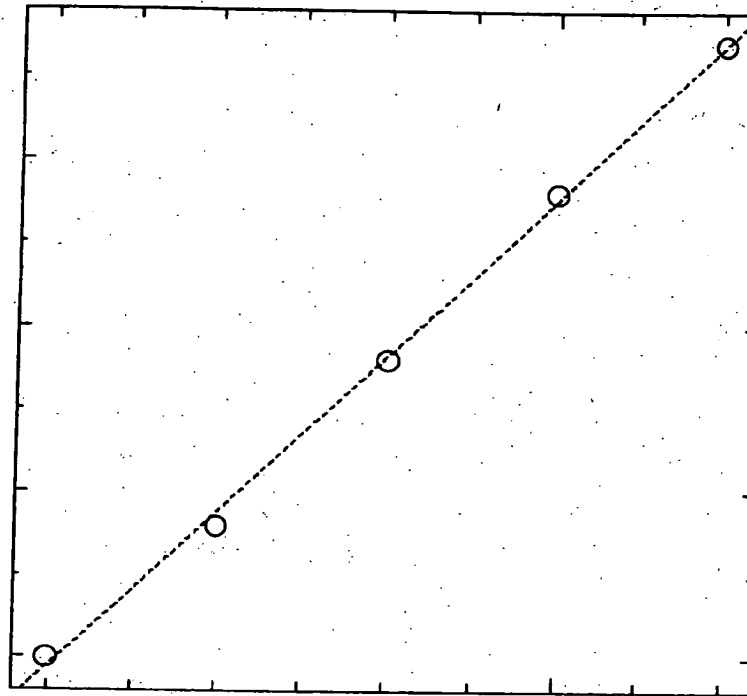


速度ループゲイン K_v

}

A1

~~[图20]~~



[[図21]]

Fig 21

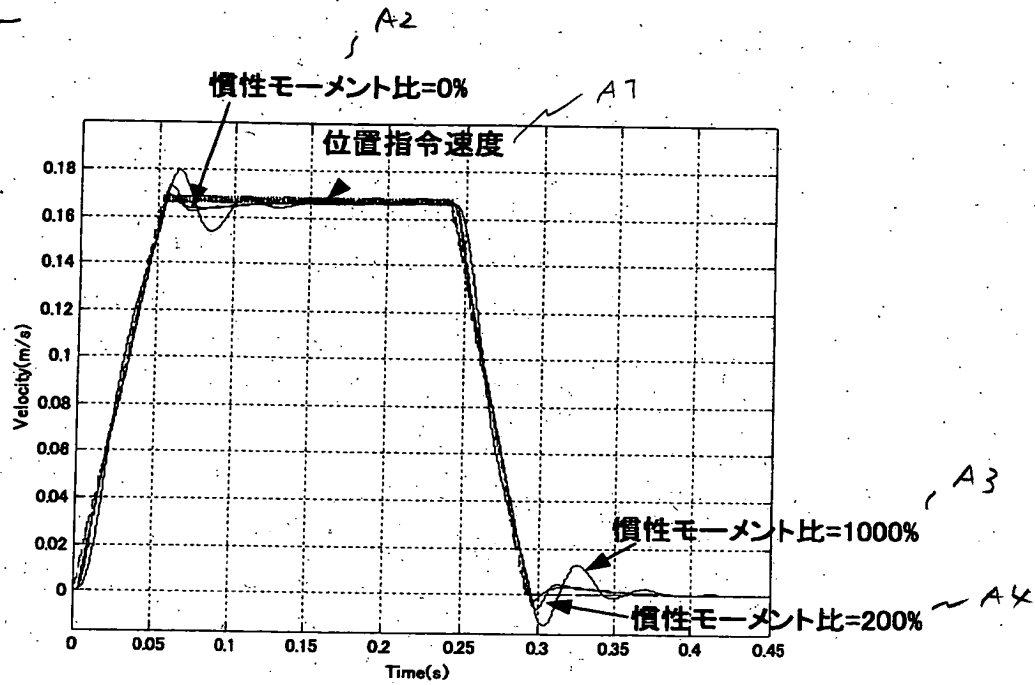


Fig. 22

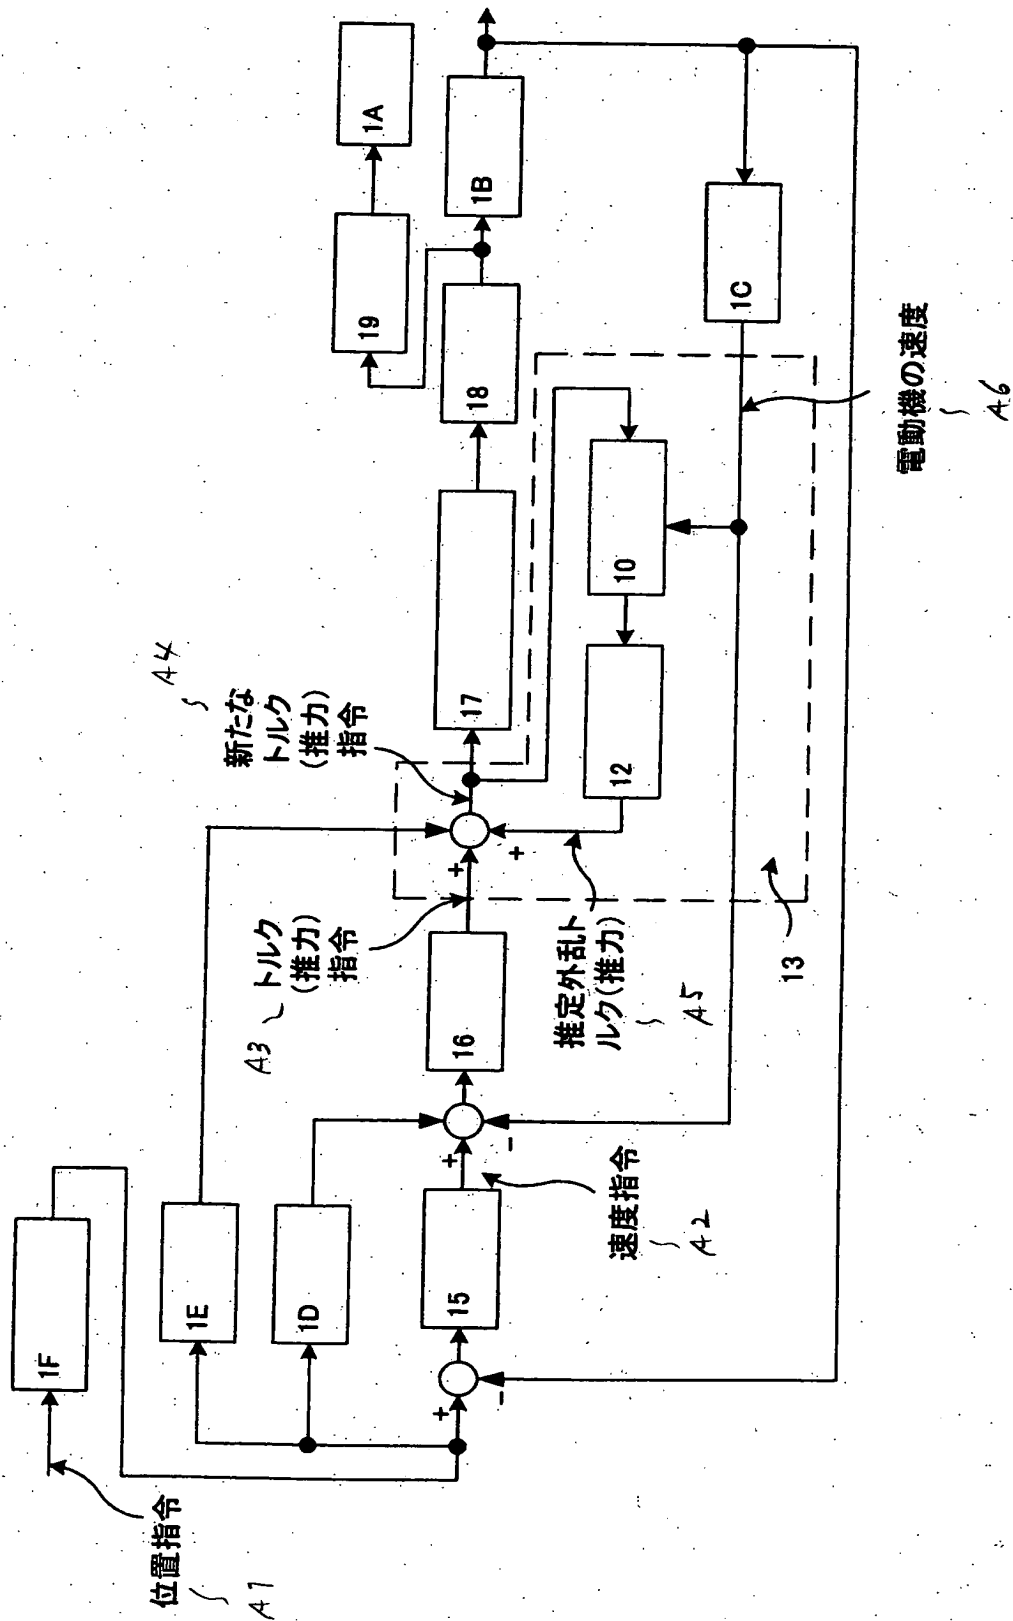


Fig. 13



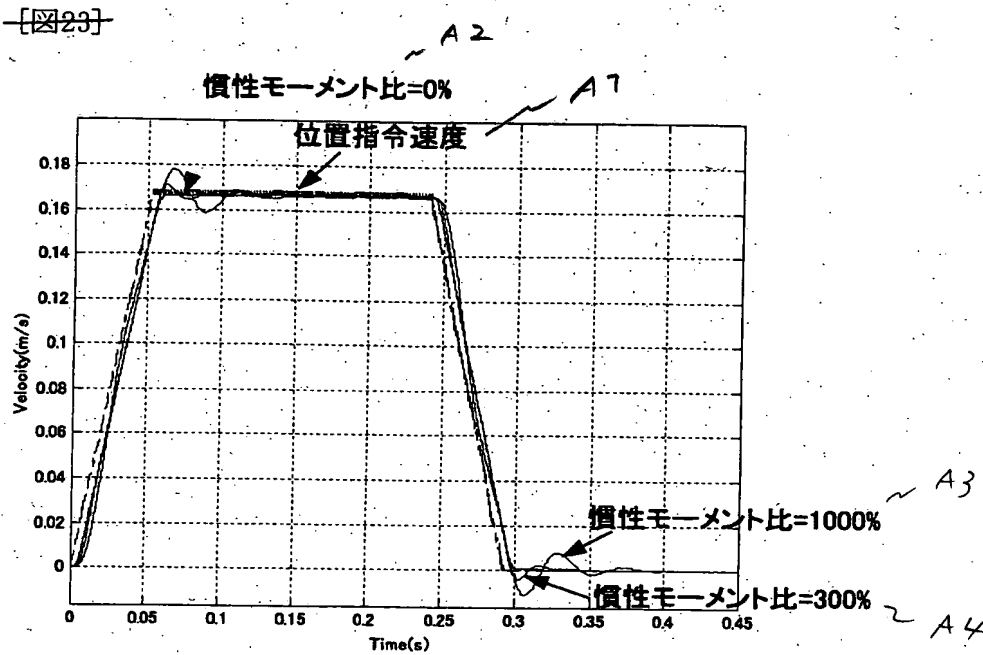


Fig. 24

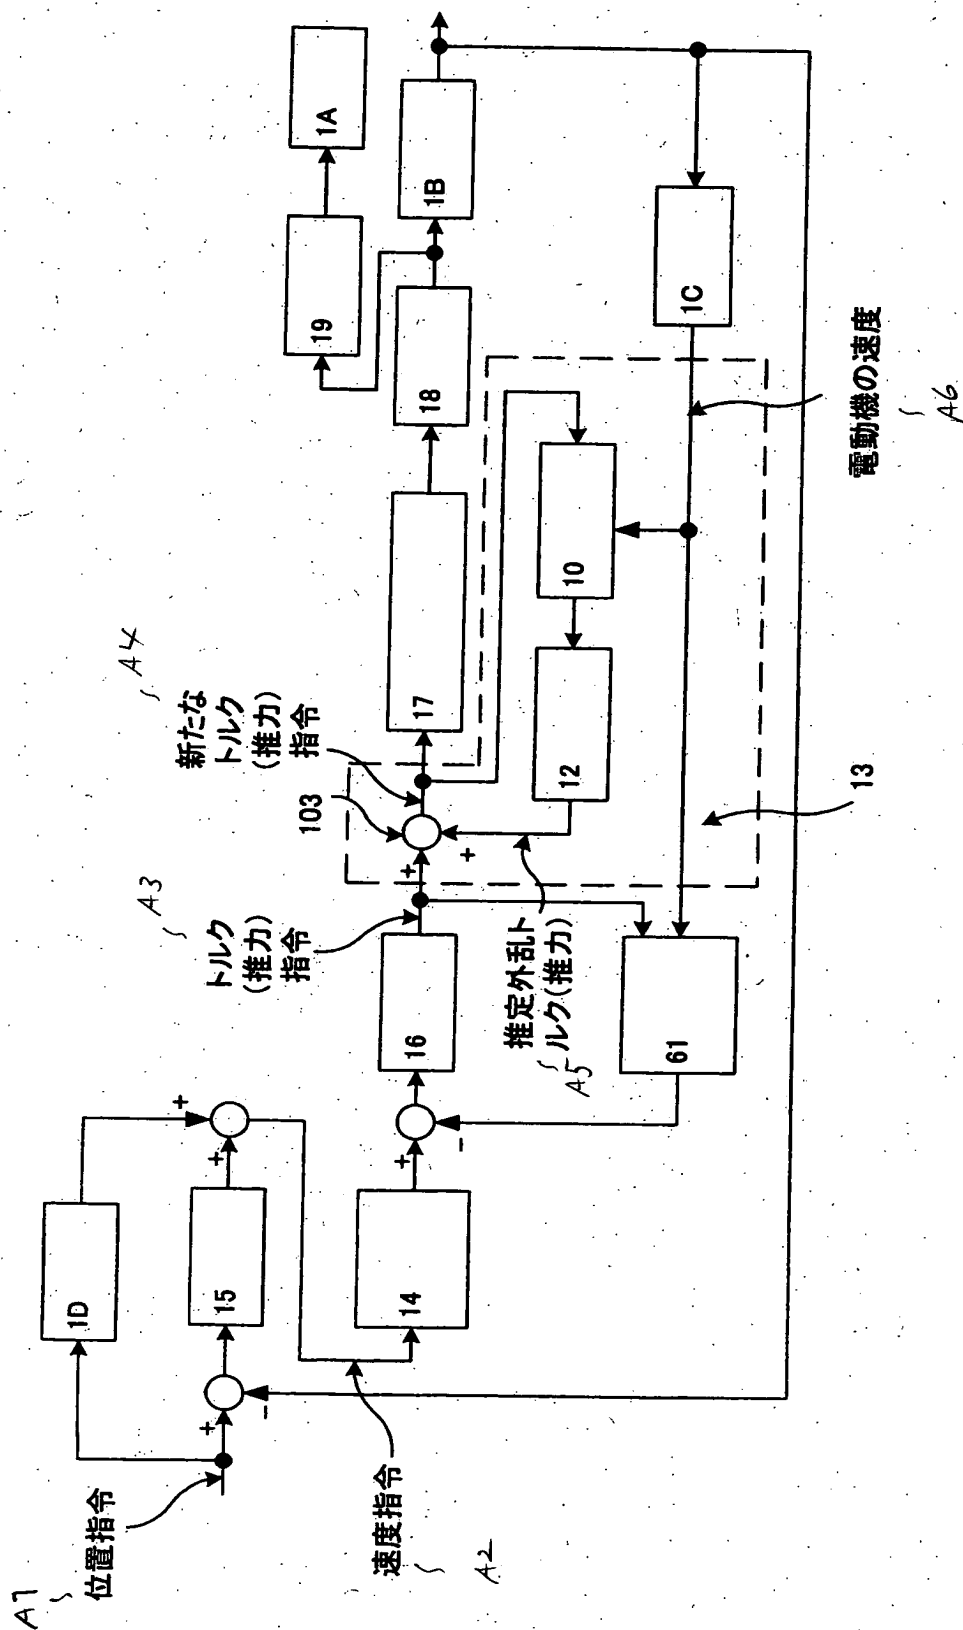


[図25]


Fig. 25

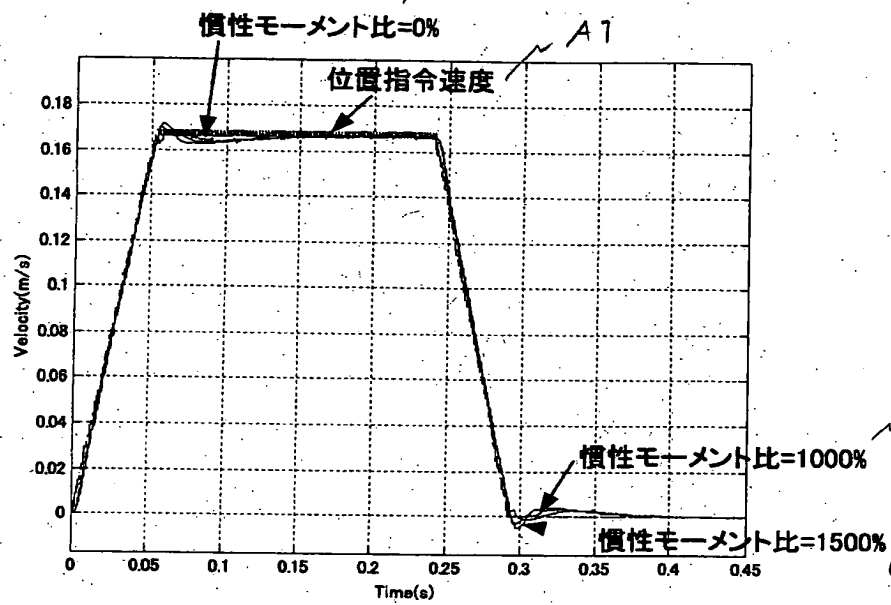

[~~図26~~]

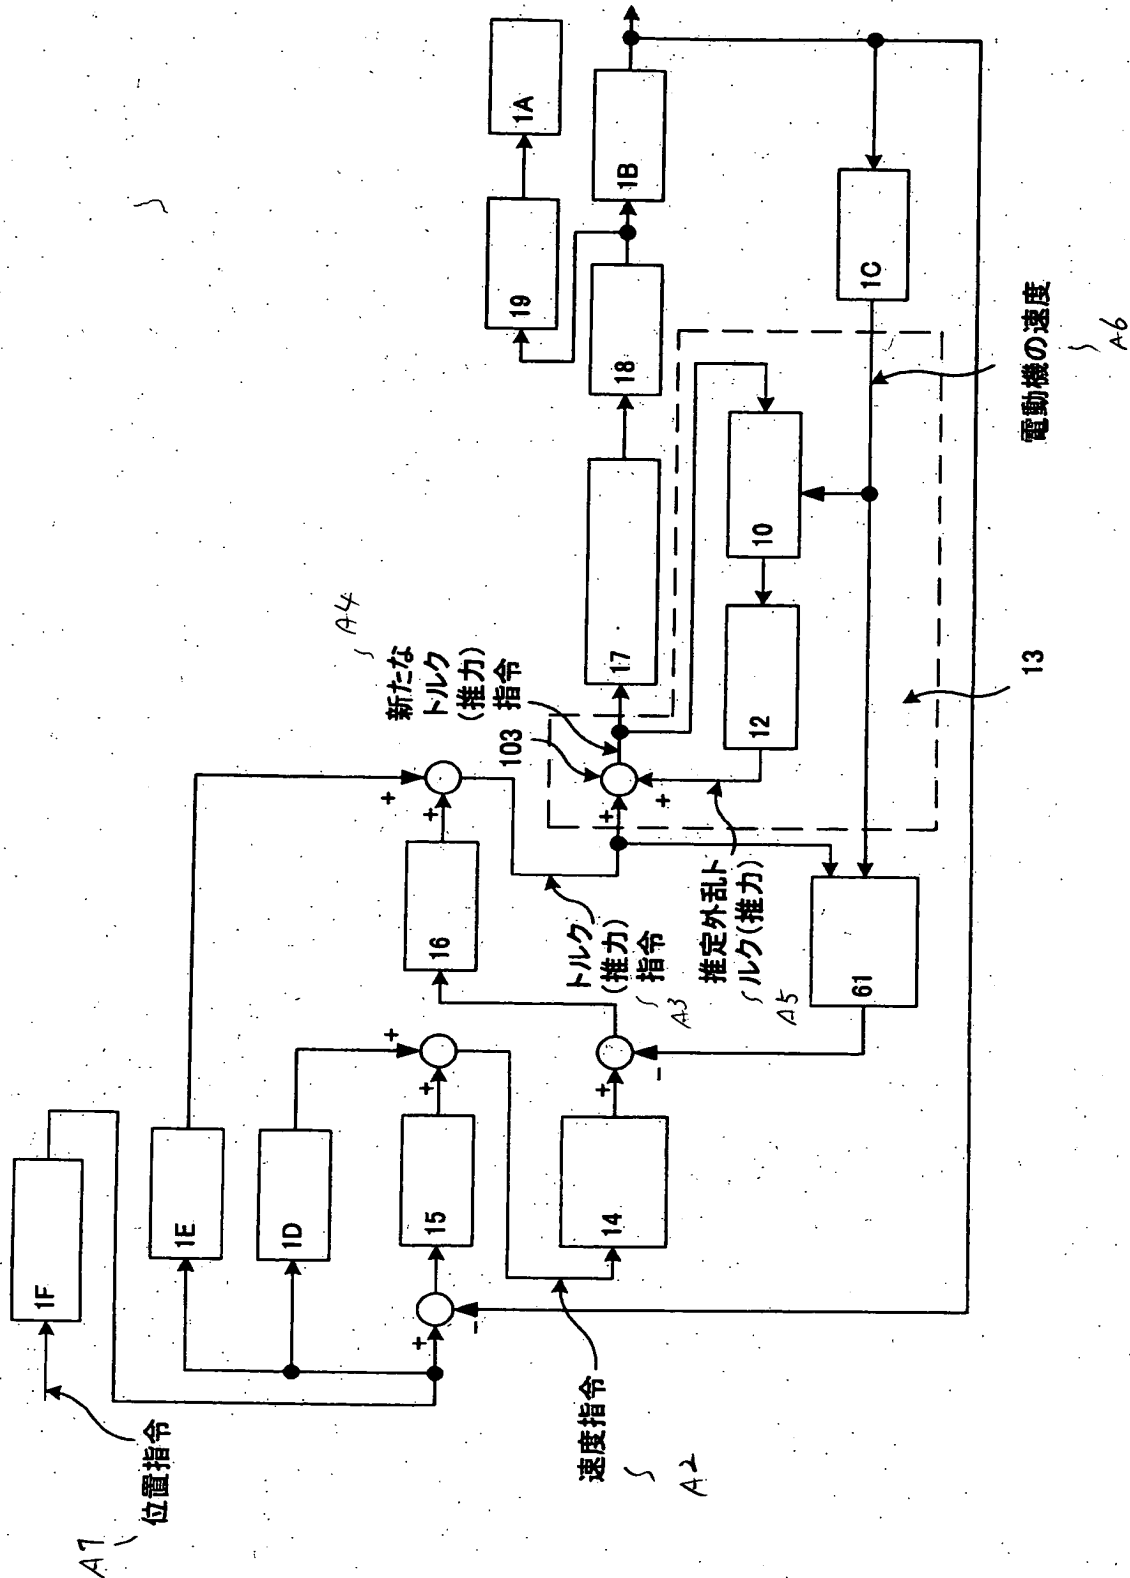

[図27]
Fig. 27

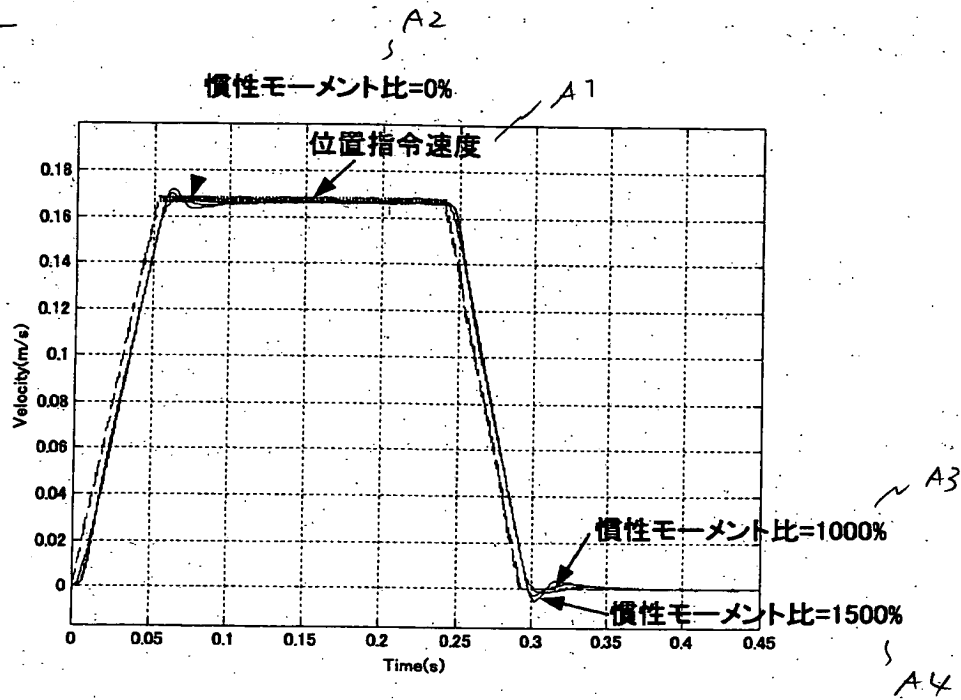

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.